



**Licensed Lexus LX**

**Kids Ride on Vehicle**

## **Assembly and Operation Instructions**



Please read this instruction manual carefully. It is important to read and follow all the steps during assembly to ensure proper operation and safety of the child. Please keep this manual for future reference.

### SPECIFICATIONS:

Battery Type:	12V10AH	Avg. Speed:	2 – 3 MPH
Age Range:	2 – 8 Years	Charging time:	8-12 hrs -MAX Charge once per month
Max. Weight:	80 lbs	Avg. Use Time:	48-90 Minutes (depending on use)
Product Size:	53"L x 34"W x 22"H	Remote Battery:	2 - AAA (not included)


### IMPORTANT!

<ul style="list-style-type: none"> <li>● Assembly of car and charging of battery by adult only. ⚠</li> </ul>	<ul style="list-style-type: none"> <li>● <b>WARNING!! NOT TO BE USED ON STREETS or IN TRAFFIC.</b></li> </ul>
<ul style="list-style-type: none"> <li>● Never modify the electric circuit system or tamper with electric system. Can cause permanent damage.</li> </ul>	<ul style="list-style-type: none"> <li>● Please check the product regularly for any loose parts or wires to ensure proper operation.</li> </ul>
<ul style="list-style-type: none"> <li>● Adult supervision is recommended during operation by child to avoid injury. Safety equipment is recommended.</li> </ul>	<ul style="list-style-type: none"> <li>● Please make sure that the child uses caution to avoid falls and collisions causing injury to the child or third party.</li> </ul>
<ul style="list-style-type: none"> <li>● <b>Do not</b> pick up vehicle by steering wheel.</li> </ul>	<ul style="list-style-type: none"> <li>● <b>Do not</b> pick up battery by wires or charger.</li> </ul>
<ul style="list-style-type: none"> <li>● Keep all plastic bags out of the reach of young children.</li> </ul>	<ul style="list-style-type: none"> <li>● Not recommended for children under the age of 2 yrs. due to small parts that could cause a choking hazard.</li> </ul>
<ul style="list-style-type: none"> <li>● Battery must be charged for a minimum of 8-12 hours prior to first use of the car to avoid damage to the battery. <b>Power switch must be in off position when charging.</b></li> </ul>	<ul style="list-style-type: none"> <li>● Battery charger should be examined for damage prior to each use. It is important to inspect the cord, and both ends for damage. If damage is found, <b>DO NOT USE THE CHARGER!</b> Contact us for replacement charger.</li> </ul>
<ul style="list-style-type: none"> <li>● Please retain instruction manual for future reference.</li> </ul>	<ul style="list-style-type: none"> <li>● Please retain packaging in the event it is necessary to return for repair.</li> </ul>

If the charger is plugged into the charging port, the car will not power up regardless if the charger is plugged into the wall outlet or not.

### Parts List by Part Number:

#	Part Name	Qty	#	Part Name	Qty	#	Part Name	Qty
1.	Body	1	6.	Hubcap	4	11.	Steering Wheel	1
2.	Gear Box	4	7.	Windshield	1	12.	Front Axle	1
3.	Wheels	4	8.	Seat	1	13.	Hood	1
4.	Rear Axle	1	9.	Rear Hatch	1	14.	Remote Control	1
5.	Charger	1	10.	Hardware Bag	1			

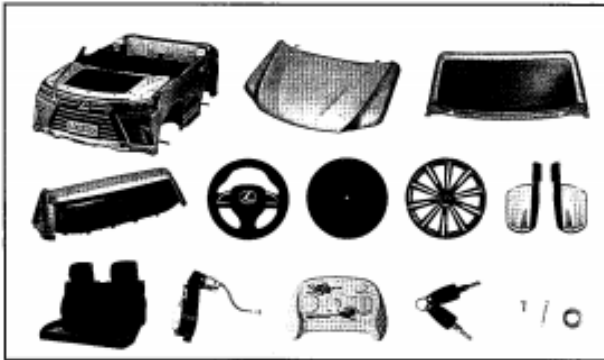

### Assembly Instructions:

- Before using, the vehicle must be assembled by an adult. It takes about 30 minutes to assemble the product.
- A Philips head screw driver and needle nose pliers will be needed.
- Do not allow children to play with parts or packaging.
- Check that all parts are present before beginning assembly.

[All assembly videos can be found on YouTube under SUPERtrax](#)

### Remove Rear Hatch


1. First, flip the vehicle over.
2. Then, remove brackets from rear wheel wells.
3. Gently remove the rear hatch from the wheel well.
4. Replace the brackets, you will use 3 screws to secure each bracket.

## Installing the Tires

1. With the car still flipped over, install a tire onto the rear axle.
2. Once the tire is on the axle, slide a washer onto the axle.
3. Then insert a cotter pin into the hole on the axle.
4. Using the needle nose pliers, bend the ends of the cotter pin so that they are going in opposite directions.
5. Repeat steps 1-4 for all tires.
6. Then collect the hubcaps and the stickers.
7. Place one sticker in the center of each hubcap
8. Snap hubcap into place on the tire.
9. Repeat for all tires.



## Connecting the Steering Wheel

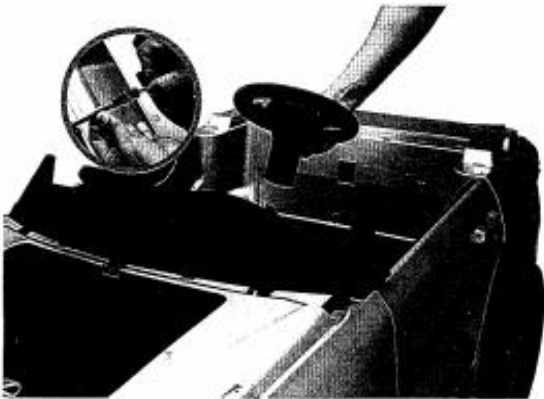

1. Remove the steering wheel bolt from the steering wheel.
2. Connect the wires from the steering column to the wires from the steering wheel.
3. Slide wires down into the steering column and slide steering wheel onto steering column.
4. Placing the nut on one side of the steering column insert the bolt and screw into place.

### **Install Rear Hatch**

1. Align the tabs on the hatch with the car.
2. Snap into place, then secure with screws.

### **Connecting the Battery**

1. Remove the battery cover by twisting the latches.
2. INSPECT WIRING, power connections should be red wire to positive (+) side of battery and black wire to negative (-) side of battery. Typically, these connections are made during the quality control inspection prior to shipping.
3. Check all remaining connectors to make sure all wiring is connected for proper operation.
4. Replace the battery cover.

### **Install the Windshield and Hood**

1. Align the tabs on the windshield with the car and press firmly into place.
2. Screw down and secure the windshield.
3. Once the windshield is secure, insert the tabs on the hood to the slots on the windshield.
4. Then close the hood.

### **Install the Side Mirrors**

1. Align side mirror with the hole on the body.
2. Gently pressing in slide mirror into hole.
3. Mirror will pop into place, repeat for other side.



### **Install the Seat**

1. Align the tabs on the back of the seat with the hole on the rear hatch.
2. Then align the screw holes, and secure with screws.


### Connecting the Remote Control

1. To connect the remote, first place two AAA batteries in the remote.
2. Then with the car off, press and hold the car select button on the remote until it begins flashing, then release car select button.
3. Turn on the car, the remote should stop flashing, then the remote will be paired.

### Battery Disposal and Replacement:

The battery will eventually lose the ability to hold a charge. Depending on the amount of use, and varying conditions, the battery should operate for one to three years. Follow these steps to replace and/or dispose of the battery:

- Open the front hood of the vehicle
- Disconnect the battery connectors (Red).
- Position the battery lock switch to unlock. Carefully lift the battery - you may want to wear protective gloves before removal - **Do Not** lift the battery by its connectors or cables.
- Place the dead battery in a plastic bag.
- Replace the battery and reconnect the connectors.
- Close the Hood.

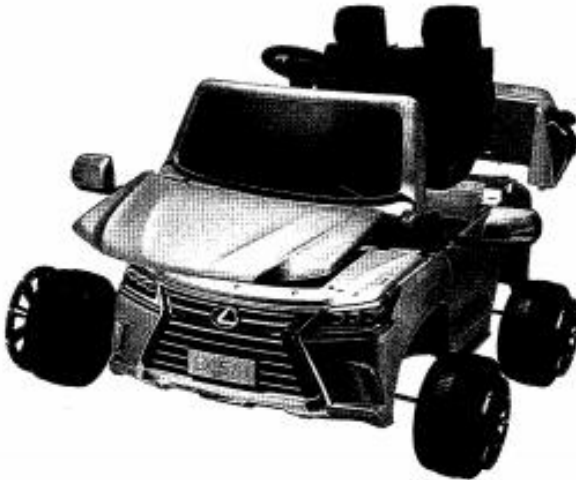

## **WARNING:**

- Use only the rechargeable battery and charger supplied with your vehicle. **NEVER** substitute the battery or charger with another brand. Using another battery or charger may cause damage.
- **NEVER** modify the electric circuit system. Tampering with the electric system may cause permanent damage to the system.
- **Do not** allow direct contact between battery terminals.
- **Do not** allow any type of liquid on the battery or its components.
- Charge the battery in a well-ventilated area **ONLY**. Do not charge near or around flammable materials.
- **NEVER** pick up the battery by the wires or charger. Damage can occur to the battery and may cause a fire. Pick up the battery by the case **ONLY**.
- Charge the battery in a dry area **ONLY**. **Wash hands after handling**.
- **Do not** open the battery. Battery contains lead acid and other materials that are toxic and corrosive.
- **Do not** open the charger. Exposed wiring and circuitry inside case could cause electric shock. **NEVER** allow a child to handle or charge the battery. Battery is heavy and contains lead acid (electrolyte).
- **Do not** drop the battery. Permanent damage to the battery could occur or cause serious injury.
- Before charging the battery, check for wear or damage to the battery, charger, its supply cord and the connectors. **DO NOT** charge the battery if any damage to parts has occurred.
- **Do not** allow the battery to drain completely. Recharge the battery after each use or once per month if not used regularly.
- **Do not** charge the battery upside down.
- **Always** secure the battery with the cover. Battery can fall out and injure a child if vehicle tips over.
- The **Power Switch** must be turned in the **OFF** position when charging.
- When the car begins to run slowly, recharge the battery.

## **GENERAL MAINTENANCE:**

It is the parent's responsibility to check main parts of the toy before using. Regularly examine the car for potential hazard, such as damage to the battery, charger, cable or cord, and plug. Also, check that all screws are tightened throughout the car. In the event of such damage, the toy must not be used until that damage is repaired or replaced.

- Make sure the plastic parts of the vehicle are not cracked or broken.
- Occasionally use a lightweight oil to lubricate moving parts such as wheels.
- Park the vehicle indoors or cover it with a tarp to protect it from wet weather.
- Keep the vehicle away from sources of heat, such as stoves and heaters. Plastic parts may melt.
- Recharge the battery after each use. Only an adult should handle the battery. Recharge the battery at least once a month when not being used.
- Do not wash the vehicle with a hose. Do not wash the vehicle with soap and water. Do not drive the vehicle in rainy or snowy weather as water will damage the motor, electric system and battery.
- Clean the vehicle with a soft, dry cloth. To restore shine to plastic parts, use a non-wax furniture polish. Do not use car wax. Do not use abrasive cleaners.
- Do not drive the vehicle in loose dirt, sand or fine gravel which could damage moving parts, motors or the electric system.
- For extended times when the car will not be used, the power switch needs to be in the off position and the electrical connections should be disconnected from the battery.



## TROUBLE SHOOTING GUIDE:

Problem	Possible Cause	Possible Solutions
Car will not move	<ol style="list-style-type: none"> <li>1. Battery voltage is low.</li> <li>2. Battery connector or wires are loose.</li> <li>3. Battery is damaged or dead.</li> <li>4. Electrical box or motor is damaged</li> </ol>	Charge the battery  Re-connect the battery connector to the car Replace battery  Replace motor
The battery will not charge.	<ol style="list-style-type: none"> <li>1. Battery connector may have come apart or have a bad connection.</li> <li>2. Battery charger plugged into bad outlet.</li> <li>3. Battery charger is damaged.</li> </ol>	Re-connect the battery connector to the car electrical connector  Try another wall outlet  Replace battery charger
Shortened battery life	Battery not charged fully Battery is old	Charge battery fully Change battery
Noise and heat when charging	Chemical reaction	Normal
Low Speed	Battery is old Battery is low on charge Weight limit exceeded  Uneven or uphill path Vehicle is being used in harsh conditions	Change the battery Charge the battery Do not exceed max weight limit Use on flat surfaces Avoid using car in harsh conditions
Noise coming from motor/gearbox	Gear in motor/gearbox broken	Call for replacement motor
The car shakes when moving	Bad Connection of the motor wires Possible motor failure	Reconnect wires Call for replacement motor
Car needs a push to go forward	Poor contact of wires and/or connectors  "Dead Spot" on motor	Check that the battery connectors are firmly plugged into each other. If wires are loose , contact the distributor's service dept. A dead spot means the electric power is not being delivered. Call service department

**Self-Resetting Breaker** – The vehicle is equipped with a self-resetting breaker. In the event the power is tripped the breaker will reset itself in approx. 1 min.

If you are unable to solve a problem, please feel free to contact us.

Phone: 402-477-0541 or Email: [customerservice@rollinghillstrading.com](mailto:customerservice@rollinghillstrading.com)