



Audi Q3 Style Kids Ride on Car Installation and Operation Instructions



Please read this instruction manual carefully. It is important to read and follow all of the steps during assembly to ensure proper operation and safety of the child. Please keep this manual for future reference.

SPECIFICATIONS:


Car Type:	Audi Q3 Style
Battery Type:	12V7AH
Electric Motor:	12V30W(Drive) 12V8W(Steering)
Age Range:	2 – 5 Years
Max. Weight:	65 lbs
Product Size:	50”L x 34”W x 25”H
Avg. Speed:	2 – 3 MPH
Charging time:	8-12 hrs
Avg. Use Time:	1-2 Hrs (depending on use)
Remote Battery:	2 - AA (not included)

IMPORTANT!

<ul style="list-style-type: none"> • Assembly of car and charging of battery is only to be done by an adult. 	<ul style="list-style-type: none"> • WARNING!! NOT TO BE USED ON STREETS or IN TRAFFIC.
<ul style="list-style-type: none"> • Never modify the electric circuit system or tamper with electric system. Can cause permanent damage. 	<ul style="list-style-type: none"> • Please check the product regularly for any loose parts or wires to ensure proper operation.
<ul style="list-style-type: none"> • Adult supervision is recommended during operation by child to avoid injury. Safety equipment is recommended. 	<ul style="list-style-type: none"> • Please make sure that the child uses caution to avoid falls and collisions causing injury to the child or third party.
<ul style="list-style-type: none"> • Do not pick up vehicle by steering wheel. 	<ul style="list-style-type: none"> • Do not pick up battery by wires or charger.
<ul style="list-style-type: none"> • Keep all plastic bags out of the reach of young children. 	<ul style="list-style-type: none"> • Not recommended for children under the age of 2 yrs. due to small parts that could cause a choking hazard.
<ul style="list-style-type: none"> • Battery must be charged for a minimum of 8-12 hours prior to first use of the car to avoid damage to the battery. Car power switch must be in off position when charging. 	<ul style="list-style-type: none"> • Battery charger should be examined for damage prior to each use. It is important to inspect the cord and both ends for damage. In the event, there is damage found, DO NOT USE THE CHARGER! Contact us for replacement charger.
<ul style="list-style-type: none"> • Please retain instruction manual for future reference. 	<ul style="list-style-type: none"> • Please retain packaging in the event it is necessary to return for repair.

If the charger is plugged into the charging port, the car will not power up regardless if the charger is plugged into the wall outlet or not.

PARTS LIST:

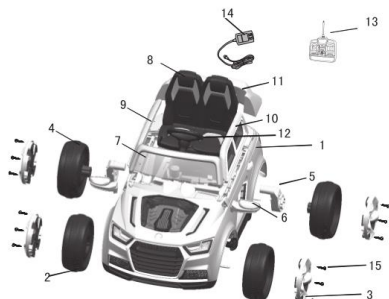

1	Car Body	7	Windshield	13	Remote Control
2	Front Wheels	8	Seat	14	Charger
3	Wheel Covers	9	Left Window	15	Screws & Nuts
4	Rear Wheel	10	Right Window	16	Cotter Pins
5	Drive Motor	11	Back Window		
6	Rearview Mirror	12	Steering Wheel		

ASSEMBLY INSTRUCTIONS:



1. **Install the car windows, rear windows, and rear speaker deck:** Snap rear speaker deck into place at the rear of the car. Snap rear window into place and secure with screws from the bottom of the car. Snap door window into place on the upper part of the door and secure with 5 screws. Repeat steps for both door windows.



2. **Installing the seat and exterior rearview mirrors:** Before putting seat into place, need to make electrical connection at the battery. Make sure that the black wire is connected to the negative pole on the battery and the red wire is connected to the positive pole on the battery. (red to red & black to black) Set seat into place over the battery area. Slip tabs on the back of the seat into slots in the body. Press the front/center of the seat down and toward the back of the car until it snaps into place. Install the exterior rearview mirrors into place and secure with screws from the bottom of the car.




3. **Install front wheels:** Install a washer on the front axle. Install a bushing to each side of wheel. Slide wheel onto the axle, making sure to keep bushings installed in the wheel stay in place. Install washer and insert cotter pin through the hole in the axle and spread ends of cotter pin to make sure that it cannot slip out of the axle. Install wheel covers onto the wheels. There are 2 tabs on the wheel covers that need to be lined up with slots in the wheels. Secure wheel covers with 3 screws. Repeat steps for second wheel. See Fig 1





4. **Install the rear wheels and motor/gearbox:** Disconnect the electrical connection from motor/gearbox located near the battery on the left side of the car. Slide motor/gearbox onto the rear axle while feeding the electrical connection through the hole in the body into the battery area and reconnect the electrical connection previously disconnected. Install a bushing to each side of wheel. Slide wheel onto the axle, making sure to keep bushings installed in the wheel stay in place. Install washer and insert cotter pin through the hole in the axle and spread ends of cotter pin to make sure that it cannot slip out of the axle. Install wheel covers onto the wheels. There are 2 tabs on the wheel covers that need to be lined up with slots in the wheels. Secure wheel covers with 3 screws. Repeat steps for second wheel. See Fig 2





5. **Install Gauges and Windshield:** Match color of electrical connector on gauges to corresponding electrical connector on the dash and make connection. Snap gauge into place on the dash. Repeat steps for 2nd gauge. Insert the windshield to proper location on the front of the dash area. Snap into place and secure with 2 screws.

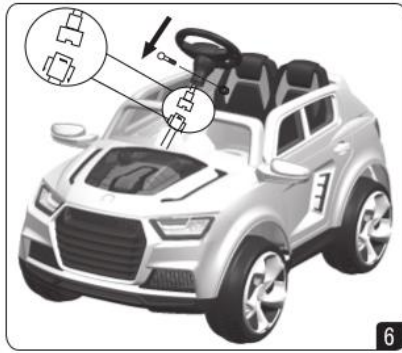


6. **Install Steering Wheel:** Connect electrical connection between the steering wheel and the wires from the car. Slide steering wheel onto the steering shaft. Align the screw hole in the steering shaft and the steering wheel and slide the bolt through the hole. Apply the nut to the end of the bolt and tighten until snug.



Charging the battery: The charging port is located just under the front portion of the seat. Plug the charger into the charging port first, then plug the charger into wall outlet. **BATTERY MUST BE CHARGED FOR A MINIMUM OF 12 HOURS BEFORE INITIAL USE TO AVOID DAMAGE TO THE BATTERY.**



REMOTE CONTROL BATTERY INSTALLATION: Open battery cover on the back of the remote control. Install 2 AA Batteries as indicated inside the cover. Replace battery cover and secure with screw.

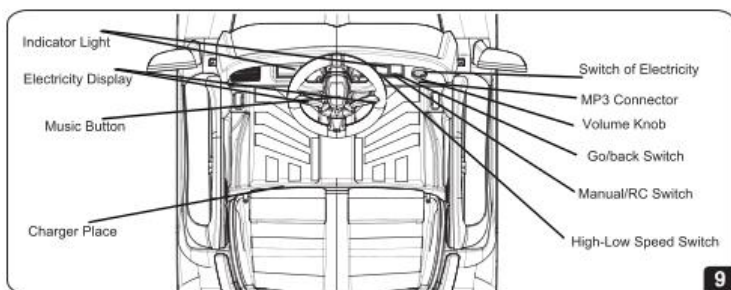

Once battery is fully charged, disconnect from charger. Depress power button to turn on the car. Once power is on, all lights light up, accompanied by the sound of the engine. (If no sound is heard, turn up the volume) To allow child to operate the car, remote control/manual switch has to be set to the manual position. To move the car forward, forward/reverse switch has to be set to the forward position and to move the car backward, the switch will need to be set to the reverse position. To operate the car using the remote control, remote control/manual switch has to be set to the remote control position.

The buttons found on the handlebars are for the horn and the on board music. There is a MP3 interface located on the dash area with a volume knob to control the level of sound.

TROUBLE SHOOTING GUIDE:

Problem	Possible Cause	Possible Solutions
Car will not move	<ol style="list-style-type: none"> 1. Battery voltage is low. 2. Screw on the wheels may have come loose. 3. Battery connector may have come apart or have a bad connection. 4. Battery is damaged 5. Electrical box is damaged 6. Motor is damaged 	Charge the battery Re-tighten screws on wheels. Re-connect the battery connector to the car electrical connector Replace battery Replace motor
The battery will not charge.	<ol style="list-style-type: none"> 1. Battery connector may have come apart or have a bad connection. 2. Battery charger plugged into a bad wall outlet. 3. Battery charger is damaged. 	Re-connect the battery connector to the car electrical connector Try another wall outlet Replace battery charger
Shortened battery life	Battery was not charged fully Battery is old	Charge battery fully Change battery
Some Noise and heat when charging battery	Chemical reaction	Normal
Low Speed	Battery is old Battery is low on charge Weight limit exceeded Uneven or uphill path	Change the battery Charge the battery Do not exceed max weight limit
Noise coming from motor/gearbox	Gear in motor/gearbox broken	Call for replacement motor
The car shakes when moving	Bad Connection of the motor wires Possible motor failure	Reconnect wires Call for replacement motor

If you are unable to solve a problem, please feel free to contact us.

IMPORTANT REMINDERS:

- Prior to first use of this electrical vehicle, please charge the battery for a minimum of 12 hours. Failure to complete this step will cause permanent damage to the battery.
- Do not operate on streets, roads, steep slopes, through ditches or in any dangerous areas.
- Do not operate on slick surfaces, such as; marble, floor tile, ice.
- This product is limited to one rider. **DO NOT OVERLOAD.** Max weight 65 pounds!
- Do not switch forward to reverse while vehicle is in motion.
- Keep car, remote control, and charger away from water and/or rain to avoid circuit damage
- Do not continue operation when car is stopped by an obstacle. Move car away from obstacle prior to resuming operation.
- Do not use in or near water.
- Any liquid in the car may cause damage.
- Not for indoor use, may cause damage to furniture, walls, and other third party.
- When remote control batteries are discharged, the car will become sluggish and jitter, replace batteries.
- When not in use, please turn off power switch. If not using for an extended period of time, please disconnect the battery.

CHARGING and BATTERY MAINTENANCE:

- **IMPORTANT!** Battery must be charged for a minimum of 12 hours prior to first use of the car to avoid damage to the battery.
- When connecting the charger, please install the plug into the car prior to plugging charger into the wall socket.
- Charging time for battery is 8-12 hours
- **DO NOT EXCEED 20** hours when charging.
- Only use the battery supplied with this car to avoid damage to the car.
- Adult supervision is advised for connecting charger.
- Never reverse polarity of the battery + to red and – to black.
- Never short circuit battery! Do not touch red wires to black wires.
- For remote control: it is not recommended to use rechargeable batteries.

WARNING:

Please keep small parts away from children to avoid choking.

GENERAL MAINTENANCE:

1. It is important to recheck all parts and components that were installed periodically to ensure proper operation.
2. For cleaning, simply wipe off with damp cloth.
3. Visual inspection and appropriate maintenance is necessary to maintain the safety of your child.
4. Maintain the safety of your child.